

Foldable Solar Panel Kit

Revision Date : March 2017



Introduction

The Foldable Solar Panel consists of 2 or 3 interconnected hinged PV modules. The flat-plate PV module construction consists of a laminated assembly of solar cells encapsulated within an insulating material with a rigid glass surface and an insulated substrate supported by an aluminium frame that can also be used for mounting the modules. The panel is rain, hail and impact resistant.

Safety

PV modules produce current and voltage when exposed to light of any intensity. Electrical current increases with higher light intensity. DC voltage of 30 Volts or higher is potentially lethal. Use insulated tools and do not wear metallic jewellery while working with PV modules.

In order to avoid arcing and electrical shock, do not disconnect electrical connections under load. Faulty connections can also result in arcing and electrical shock. Keep connectors dry and clean, and ensure that they are in proper working condition. Never insert metallic objects into the connectors, or modify them in any way in order to secure an electrical connection.

Ecoficiency does not assume responsibility and expressly disclaims liability for losses, damages, or expenses arising out of, or in any way connected with the product.




Specifications

Model No	FPV-200
Cell type	Polycrystalline
PV Array power STC	200 Wp
Open circuit voltage (Voc)	21.1 V
Optimum operating voltage (Vmp)	18 V
Short circuit current (Isc)	14.72 A
Optimum operating current (Imp)	11.12 A

STC at 1000w/m², 25° C

Visit www.ecoficiency.co.za for more information and documentation on this and other products or email sales@ecoficiency.co.za.

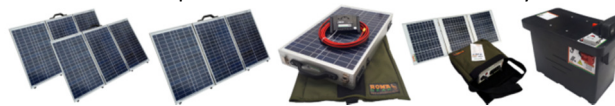

Foldable Solar Panel Kit - 200w (2x 100w)




Installation

PV modules should ideally be tilted at an angle of 30 degrees - facing North. Partial or complete shading of PV modules can significantly reduce system performance. High system voltages could be induced in the event of an indirect lightning strike, which could cause damage to PV system components.

Electrical Considerations

Under normal conditions, a photovoltaic module is likely to experience conditions that produce more current and/or voltage than reported at Standard Test Conditions (STC: 1000 W/m², AM 1.5, and 25°C cell temperature). The short-circuit current (ISC) and the open-circuit voltage (VOC) should be multiplied by a factor of 1.25 when determining component voltage ratings, conductor current ratings, fuse sizes, and size of controls connected to the PV output. A Fuse rated no more than 20Amp is recommended between the controller and battery (on the positive cable)

Electrical Connection

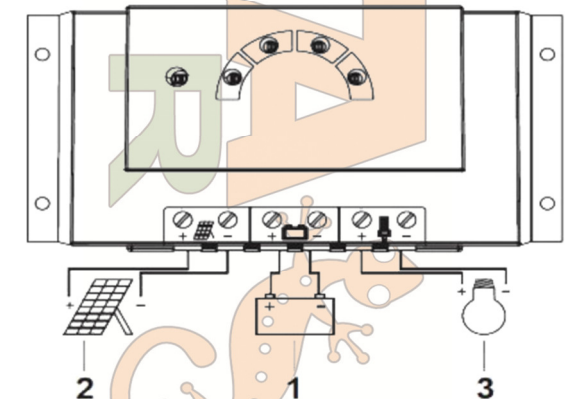

1 - Battery | 2 - Solar Panels | 3 - Load (lights etc)

Important:

Always first connect the battery to the solar controller/regulator and then connect the solar panel and any loads (lights/fridges etc.)